




52300,54300,54300U 系統
雙向推力球軸承

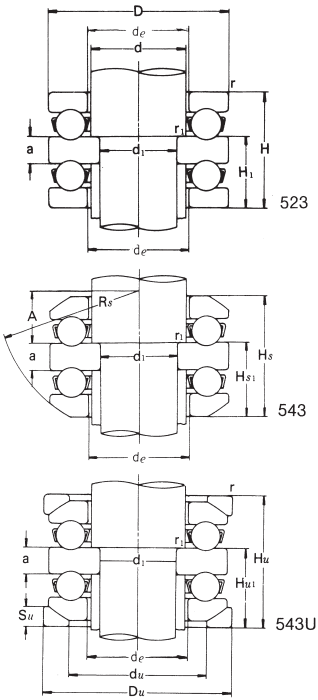

軸 承 型 號			主 要						
523	543	543U	d	d ₁	d _e	d _u	D	D _u	H
52305	54305	54305U	25	20	27	38	52	55	34
06	06	06U	30	25	32	45	60	62	38
07	07	07U	35	30	37	52	68	72	44
08	08	08U	40	30	42	60	78	82	49
52309	54309	54309U	45	35	47	65	85	90	52
10	10	10U	50	40	52	72	95	100	58
11	11	11U	55	45	57	80	105	110	64
12	12	12U	60	50	62	85	110	115	64
52313	54313	54313U	65	55	67	90	115	120	65
14	14	14U	70	55	72	98	125	130	72
15	15	15U	75	60	77	105	135	140	79
16	16	16U	80	65	82	110	140	145	79
52317	54317	54317U	85	70	88	115	150	155	87
18	18	18U	90	75	93	120	155	160	88
20	20	20U	100	85	103	135	170	175	97
22	22	22U	110	95	113	150	190	195	110
52324	54324	54324U	120	100	123	165	210	220	123
26	—	—	130	110	134	—	225	—	130
28	—	—	140	120	144	—	240	—	140
30	—	—	150	130	154	—	250	—	140
52332	—	—	160	140	164	—	270	—	153
34	—	—	170	150	174	—	280	—	153
36	—	—	180	150	184	—	300	—	165
38	—	—	190	160	195	—	320	—	183
40	—	—	200	170	205	—	340	—	192

尺 寸 (mm)											基本額定負荷 (kgf)		重 量 (kg)		
H ₁	H _s	H _{s1}	H _u	H _{u1}	A	R _s	a	S _u	r _s 最小	r _{1s} 最小	動負荷 C _e	靜負荷 C _o	523	543	543U
21	37.6	22.8	42	25	18	45	8	6	1	0.3	3640	6270	0.33	0.34	0.428
23.5	41.2	25.1	46	27.5	19.5	50	9	7	1	0.3	4360	8020	0.49	0.49	0.602
27	47.2	28.6	52	31	21	56	10	7.5	1	0.3	5660	10700	0.71	0.73	0.898
30.5	54	33	59	35.5	23.5	64	12	8.5	1	0.6	7060	13700	1.06	1.10	1.34
32	56.2	34.1	62	37	21	64	12	10	1	0.6	8160	16700	1.29	1.28	1.62
36	64.6	39.3	70	42	23	72	14	11	1.1	0.6	9340	19000	1.86	1.89	2.35
39.5	72.6	43.8	78	46.5	25.5	80	15	11.5	1.1	0.6	12200	25100	2.51	2.65	3.21
39.5	70.6	42.8	78	46.5	36.5	90	15	11.5	1.1	0.6	12600	27200	2.68	2.75	3.37
40	71.8	43.4	79	47	34.5	90	15	12.5	1.1	0.6	13000	29300	2.90	2.98	3.66
44	80.4	48.2	88	52	39	100	16	13	1.1	1	15100	34600	3.90	3.96	4.78
48.5	87.2	52.6	95	56.5	32.5	100	18	15	1.5	1	17400	40400	4.83	4.98	6.08
48.5	86.2	52.1	95	56.5	45.5	112	18	15	1.5	1	18000	43300	5.06	5.22	6.36
53	95.2	57.1	105	62	39	112	19	17.5	1.5	1	21000	49800	6.4	6.41	8.03
53.5	97.2	58.1	106	62.5	36.5	112	19	18	1.5	1	21700	53400	6.6	6.67	8.44
59	105.4	63.2	115	68	42	125	21	18	1.5	1	24100	60800	8.9	8.93	10.8
67	118.4	71.2	128	76	47	140	24	20.5	2	1	28500	76900	13.8	13.7	16.3
75	131.2	79.1	143	85	58	160	27	22	2.1	1.1	33200	94900	17.2	18.8	22.9
80	—	—	—	—	—	—	30	—	2.1	1.1	35300	105000	22.2	—	—
85.5	—	—	—	—	—	—	31	—	2.1	1.1	37400	115000	27.9	—	—
85.5	—	—	—	—	—	—	31	—	2.1	1.1	38400	123000	29.3	—	—
93	—	—	—	—	—	—	33	—	3	1.1	47900	160000	37.8	—	—
93	—	—	—	—	—	—	33	—	3	1.1	47200	160000	39.7	—	—
101	—	—	—	—	—	—	37	—	3	2	47200	161000	51.0	—	—
111.5	—	—	—	—	—	—	40	—	4	2	55400	199000	65.1	—	—
117	—	—	—	—	—	—	42	—	4	2	60800	227000	78.0	—	—