




52400,54400,54400U 系統
雙向推力球軸承

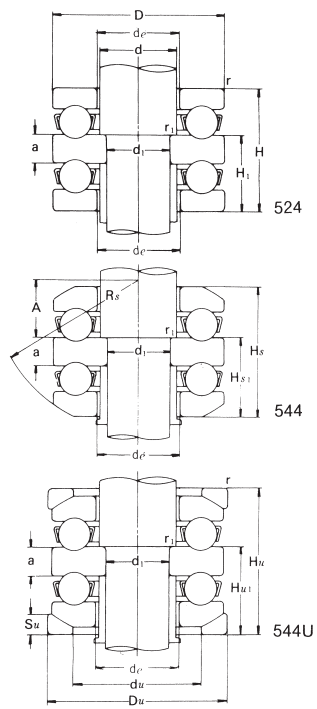

軸 承 型 號			主 要						
524	544	544U	d	d ₁	d _e	d _u	D	D _u	H
52405	54405	54405U	25	15	27	42	60	62	45
06	06	06U	30	20	32	50	70	75	52
07	07	07U	35	25	37	58	80	85	59
08	08	08U	40	30	42	65	90	95	65
52409	54409	54409U	45	35	47	72	100	105	72
10	10	10U	50	40	52	80	110	115	78
11	11	11U	55	45	57	88	120	125	87
12	12	12U	60	50	62	95	130	135	93
52413	54413	54413U	65	50	68	100	140	145	101
14	14	14U	70	55	73	110	150	155	107
15	15	15U	75	60	78	115	160	165	115
16	16	16U	80	65	83	125	170	175	120
52417	54417	54417U	85	65	88	130	180	185	128
18	18	18U	90	70	93	140	190	195	135
20	20	20U	100	80	103	155	210	220	150
22	—	—	110	90	113	—	230	—	166
52424	—	—	120	95	123	—	250	—	177
26	—	—	130	100	134	—	270	—	192
28	—	—	140	110	144	—	280	—	196
30	—	—	150	120	154	—	300	—	209
52432	—	—	160	130	164	—	320	—	226
34	—	—	170	135	174	—	340	—	236
36	—	—	180	140	184	—	360	—	245

尺 寸 (mm)											基本額定負荷 (kgf)		重 量 (kg)		
H ₁	H _s	H _{s1}	H _u	H _{u1}	A	R _s	a	S _u	r _s 最小	r _{1s} 最小	動負荷 C _e	靜負荷 C _o	524	544	544U
28	49.8	30.4	55	33	15	50	11	8	1	0.6	5670	9110	0.63	0.66	0.804
32	56.2	34.1	62	37	16	56	12	9	1	0.6	7420	12800	1.00	0.99	1.25
36.5	63	38.5	69	41.5	18.5	64	14	10	1.1	0.6	8880	15800	1.44	1.45	1.79
40	69.4	42.2	77	46	22	72	15	12	1.1	0.6	11500	20900	2.03	2.05	2.55
44.5	78.8	47.9	86	51.5	23.5	80	17	12.5	1.1	0.6	13200	24700	2.91	2.78	3.42
48	83.2	50.6	92	55	30	90	18	14	1.5	0.6	15100	28800	3.56	3.57	4.39
53.5	92	56	101	60.5	22.5	90	20	15.5	1.5	0.6	18200	36600	4.70	4.56	5.62
57	99	60	107	64	28	100	21	16	1.5	0.6	20500	40500	6.33	6.22	7.60
62	109.4	66.2	119	71	34	112	23	17.5	2	1	23600	50300	8.03	8.10	9.72
65.5	114.2	69.1	125	74.5	28.5	112	24	19.5	2	1	25500	56400	9.71	9.61	11.6
70.5	123	74.5	135	80.5	36.5	125	26	21	2	1	25700	57100	11.8	11.8	14.3
73.5	128.4	77.7	140	83.5	30.5	125	27	22	2.1	1	27500	63300	14.0	13.8	16.6
78.5	138	83.5	150	89.5	40.5	140	29	23	2.1	1.1	31300	76700	17.5	16.5	19.7
82.5	143.4	86.7	157	93.5	34.5	140	30	25.5	2.1	1.1	33300	84200	19.6	19.0	22.8
91.5	160	96.5	176	104.5	43.5	160	33	27	3	1.1	37500	100000	26.6	26.2	32.0
101.5	—	—	—	—	—	—	37	—	3	1.1	38700	109000	35.0	—	—
108.5	—	—	—	—	—	—	40	—	4	1.5	49000	149000	44.3	—	—
117	—	—	—	—	—	—	42	—	4	2	50800	157000	56.6	—	—
120	—	—	—	—	—	—	44	—	4	2	53000	171000	60.8	—	—
127.5	—	—	—	—	—	—	46	—	4	2	58000	194000	74.1	—	—
138	—	—	—	—	—	—	50	—	5	2	69500	246000	90.5	—	—
143	—	—	—	—	—	—	50	—	5	2.1	77000	278000	108	—	—
148.5	—	—	—	—	—	—	52	—	5	3	75700	278000	126	—	—