




2200 系統寬型

自動調心球軸承

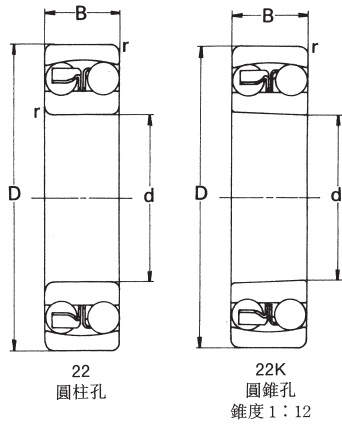

軸 承 型 號	主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數(rpm)		重量(kg)	
	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	22	22K
2200	10	30	14	0.6	750	165	23000	29000	0.047	—
01	12	32	14	0.6	780	180	21000	26000	0.053	—
02	15	35	14	0.6	785	190	18000	22000	0.060	—
03	17	40	16	0.6	1000	245	16000	20000	0.088	—
2204(K)	20	47	18	1	1280	335	14000	17000	0.140	0.136
05(K)	25	52	18	1	1280	355	12000	15000	0.163	0.158
06(K)	30	62	20	1	1580	465	10000	12000	0.260	0.254
07(K)	35	72	23	1.1	2210	675	8500	10000	0.403	0.396
2208(K)	40	80	23	1.1	2290	750	7600	9300	0.505	0.494
09(K)	45	85	23	1.1	2370	830	7000	8500	0.545	0.533
10(K)	50	90	23	1.1	2380	865	6500	7900	0.590	0.577
11(K)	55	100	25	1.5	2710	1010	5800	7100	0.810	0.792
2212(K)	60	110	28	1.5	3480	1290	5300	6500	1.09	1.07
13(K)	65	120	31	1.5	4440	1670	4900	5900	1.46	1.43
14 —	70	125	31	1.5	4480	1750	4600	5600	1.52	—
15(K)	75	130	31	1.5	4510	1820	4300	5300	1.62	1.58
2216(K)	80	140	33	2	4990	2030	4100	5000	2.0	1.97
17(K)	85	150	36	2	5940	2400	3800	4600	2.52	2.46
18(K)	90	160	40	2	6900	2770	3500	4300	3.40	3.33
19(K)	95	170	43	2.1	8440	3500	3300	4000	4.10	4.00
2220(K)	100	180	46	2.1	8250	3470	3100	3800	4.98	4.87
21 —	105	190	50	2.1	9680	4090	3000	3600	6.07	—
22(K)	110	200	53	2.1	12200	4990	2800	3400	7.10	6.94