


NN3000 系統

雙列圓筒滾柱軸承

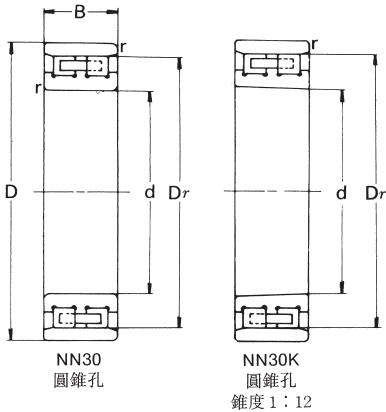

軸 承 型 號		主 要 尺 寸 (mm)					基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	Dr	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	NN	NN-K
NN3005	NN3005K	25	47	16	0.6	41.3	2620	3060	14000	17000	0.127	0.123
06	06K	30	55	19	1	48.5	3750	4490	12000	14000	0.198	0.192
07	07K	35	62	20	1	55	3990	5100	10000	12000	0.253	0.246
08	08K	40	68	21	1	61	4210	5700	9100	11000	0.307	0.298
NN3009	NN3009K	45	75	23	1	67.5	5440	7330	8300	9900	0.404	0.382
10	10K	50	80	23	1	72.5	5380	7410	7600	9100	0.429	0.415
11	11K	55	90	26	1.1	81	7260	10300	6800	8200	0.637	0.618
12	12K	60	95	26	1.1	86.1	7430	10800	6400	7700	0.685	0.664
NN3013	NN3013K	65	100	26	1.1	91	7600	11400	6000	7200	0.728	0.705
14	14K	70	110	30	1.1	100	9880	15100	5500	6500	1.04	1.02
15	15K	75	115	30	1.1	105	10100	15800	5200	6200	1.11	1.08
16	16K	80	125	34	1.1	113	12100	19000	4800	5800	1.55	1.50
NN3017	NN3017K	85	130	34	1.1	118	12400	19800	4600	5500	1.63	1.58
18	18K	90	140	37	1.5	127	14500	23200	4200	5100	2.07	2.01
19	19K	95	145	37	1.5	132	15300	25100	4100	4900	2.17	2.10
20	20K	100	150	37	1.5	137	16000	27000	3900	4700	2.28	2.21
NN3021	NN3021K	105	160	41	2	146	20100	32800	3700	4400	2.88	2.81
22	22K	110	170	45	2	155	22500	36800	3500	4200	3.65	3.56
24	24K	120	180	46	2	165	23700	40000	3200	3900	4.00	3.87
26	26K	130	200	52	2	182	28900	48600	2900	3500	5.94	5.76
NN3028	NN3028K	140	210	53	2	192	30300	52600	2700	3300	6.41	6.21
30	30K	150	225	56	2.1	206	34000	59900	2500	3000	7.74	7.50
32	32K	160	240	60	2.1	219	40600	70800	2400	2800	9.38	9.08
34	34K	170	260	67	2.1	236	48000	84000	2200	2600	12.8	12.4
NN3036	NN3036K	180	280	74	2.1	255	57200	97700	2000	2400	16.8	16.3
38	38K	190	290	75	2.1	265	61000	104000	1900	2300	17.6	17.1
40	40K	200	310	82	2.1	282	65100	114000	1700	2100	22.5	21.8
44	44K	220	340	90	3	310	76700	140000	1600	1900	29.3	28.4
NN3048	NN3048K	240	360	92	3	330	88100	163000	1400	1700	32.8	31.8
52	52K	260	400	104	4	364	105000	187000	1300	1500	47.4	46.0
56	56K	280	420	106	4	384	111000	205000	1200	1400	51.2	49.6
60	60K	300	460	118	4	418	131000	251000	1100	1300	70.8	68.7
64	64K	320	480	121	4	438	138000	272000	980	1200	76.4	74.0