


30200JR 系 統

錐形滾柱軸承

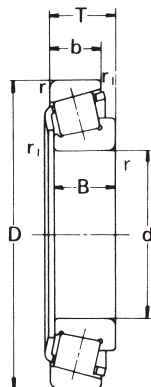

軸 承 型 號	主 要 尺 寸 (mm)							基本額定負荷 (kgf)		容許回轉數(rpm)		重量 (kg)
	d	D	B	b	T	r _s 最小	r _{1s} 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	
30203JR	17	40	12	11	13.25	1	1	2120	2110	10000	14000	0.074
04JR	20	47	14	12	15.25	1	1	2750	2770	8700	12000	0.120
05JR	25	52	15	13	16.25	1	1	3220	3440	7800	10000	0.145
06JR	30	62	16	14	17.25	1	1	4230	4570	6500	8700	0.222
30207JR	35	72	17	15	18.25	1.5	1.5	5620	6210	5600	7400	0.318
08JR	40	80	18	16	19.75	1.5	1.5	6410	7050	5000	6700	0.413
09JR	45	85	19	16	20.75	1.5	1.5	6850	7890	4600	6100	0.467
10JR	50	90	20	17	21.75	1.5	1.5	7800	9350	4300	5700	0.525
30211JR	55	100	21	18	22.75	2	1.5	9640	11500	3900	5200	0.687
12JR	60	110	22	19	23.75	2	1.5	10800	13000	3500	4700	0.860
13JR	65	120	23	20	24.75	2	1.5	13100	15900	3200	4300	1.11
14JR	70	125	24	21	26.25	2	1.5	14100	17600	3100	4100	1.22
30215JR	75	130	25	22	27.25	2	1.5	14500	18500	2900	3900	1.34
16JR	80	140	26	22	28.25	2.5	2	16500	20600	2700	3600	1.59
17JR	85	150	28	24	30.5	2.5	2	18600	23600	2500	3400	2.01
18JR	90	160	30	26	32.5	2.5	2	20800	26600	2400	3200	2.49
30219JR	95	170	32	27	34.5	3	2.5	23600	30500	2200	3000	2.95
20JR	100	180	34	29	37	3	2.5	26300	34400	2100	2800	3.58
21JR	105	190	36	30	39	3	2.5	29400	38800	2000	2600	4.18
22JR	110	200	38	32	41	3	2.5	33000	44300	1900	2500	4.99
30224JR	120	215	40	34	43.5	3	2.5	35400	48200	1700	2300	6.02
26JR	130	230	40	34	43.75	4	3	38400	52100	1600	2100	7.60
28JR	140	250	42	36	45.75	4	3	42800	58100	1500	1900	8.65
30JR	150	270	45	38	49	4	3	49200	67700	1300	1800	10.8