


30300JR 系 統

錐形滾柱軸承

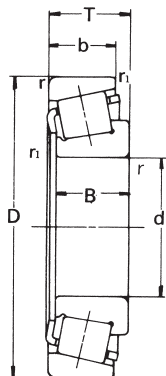

軸 承 型 號	主 要 尺 寸 (mm)							基本額定負荷 (kgf)		容許回轉數 (rpm)		重量 (kg)
	d	D	B	b	T	r _s 最小	r _{1s} 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	
30302JR	15	42	13	11	14.25	1	1	2230	1960	10000	14000	0.093
03JR	17	47	14	12	15.25	1	1	2790	2500	9200	12000	0.126
04JR	20	52	15	13	16.25	1.5	1.5	3690	3580	8300	11000	0.164
05JR	25	62	17	15	18.25	1.5	1.5	4920	4790	6800	9000	0.256
30306JR	30	72	19	16	20.75	1.5	1.5	6070	6130	5800	7700	0.377
07JR	35	80	21	18	22.75	2	1.5	7350	7470	5200	6900	0.507
08JR	40	90	23	20	25.25	2	1.5	9240	10300	4500	6100	0.701
09JR	45	100	25	22	27.25	2	1.5	11500	13100	4100	5400	0.940
30310JR	50	110	27	23	29.25	2.5	2	14000	15500	3700	4900	1.19
11JR	55	120	29	25	31.5	2.5	2	15200	17400	3300	4500	1.53
12JR	60	130	31	26	33.5	3	2.5	17700	20500	3100	4100	1.90
13JR	65	140	33	28	36	3	2.5	20800	24400	2800	3800	2.33
30314JR	70	150	35	30	38	3	2.5	23500	27800	2600	3500	2.86
15JR	75	160	37	31	40	3	2.5	26500	31700	2500	3300	3.40
16JR	80	170	39	33	42.5	3	2.5	30000	36200	2300	3100	3.99
17JR	85	180	41	34	44.5	4	3	32300	39100	2200	2900	4.73
30318JR	90	190	43	36	46.5	4	3	35200	42900	2100	2700	5.50
19JR	95	200	45	38	49.5	4	3	37900	46400	2000	2600	6.52
20JR	100	215	47	39	51.5	4	3	43100	53100	1800	2400	7.87
21JR	105	225	49	41	53.5	4	3	47300	59000	1700	2300	9.15
30322JR	110	240	50	42	54.5	4	3	49000	60200	1600	2100	12.50
24JR	120	260	55	46	59.5	4	3	58100	72800	1500	2000	13.80