



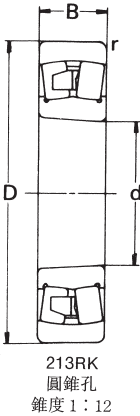

21300R 系統

球面滾柱軸承

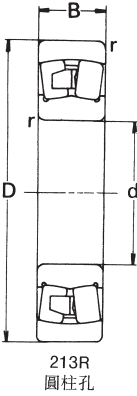

| 軸 承 型 號 |         | 主 要 尺 寸<br>(mm) |     |    |                      | 基本額定負荷<br>(kgf)       |                       | 容許回轉數<br>(rpm) |      | 重 量<br>(kg) |       |
|---------|---------|-----------------|-----|----|----------------------|-----------------------|-----------------------|----------------|------|-------------|-------|
| 圓柱孔     | 圓錐孔     | d               | D   | B  | r <sub>s</sub><br>最小 | 動負荷<br>C <sub>o</sub> | 靜負荷<br>C <sub>o</sub> | 脂潤滑            | 油潤滑  | 213R        | 213RK |
| 21308R  | 21308RK | 40              | 90  | 23 | 1.5                  | 8510                  | 9230                  | 4500           | 6100 | 0.71        | 0.699 |
| 09R     | 09RK    | 45              | 100 | 25 | 1.5                  | 10600                 | 11900                 | 4000           | 5400 | 0.95        | 0.935 |
| 10R     | 10RK    | 50              | 110 | 27 | 2                    | 13100                 | 15300                 | 3700           | 4900 | 1.21        | 1.19  |
| 11R     | 11RK    | 55              | 120 | 29 | 2                    | 16100                 | 19400                 | 3300           | 4500 | 1.58        | 1.56  |
| 21312R  | 21312RK | 60              | 130 | 31 | 2.1                  | 17600                 | 20800                 | 3100           | 4100 | 1.96        | 1.93  |
| 13R     | 13RK    | 65              | 140 | 33 | 2.1                  | 20200                 | 24300                 | 2800           | 3800 | 2.45        | 2.41  |
| 14R     | 14RK    | 70              | 150 | 35 | 2.1                  | 23500                 | 29100                 | 2700           | 3500 | 2.99        | 2.95  |
| 15R     | 15RK    | 75              | 160 | 37 | 2.1                  | 25500                 | 31800                 | 2500           | 3300 | 3.56        | 3.51  |
| 21316R  | 21316RK | 80              | 170 | 39 | 2.1                  | 26100                 | 32200                 | 2300           | 3100 | 4.18        | 4.12  |
| 17R     | 17RK    | 85              | 180 | 41 | 3                    | 31000                 | 39500                 | 2200           | 2900 | 4.98        | 4.91  |
| 18R     | 18RK    | 90              | 190 | 43 | 3                    | 35300                 | 45200                 | 2100           | 2800 | 5.80        | 5.71  |
| 19R     | 19RK    | 95              | 200 | 45 | 3                    | 38000                 | 48900                 | 1900           | 2600 | 7.15        | 7.05  |
| 21320R  | 21320RK | 100             | 215 | 47 | 3                    | 42200                 | 53800                 | 1800           | 2400 | 8.79        | 8.67  |
| 22R     | 22RK    | 110             | 240 | 50 | 3                    | 50800                 | 65400                 | 1600           | 2100 | 11.8        | 11.6  |