




22200R 系統

球面滾柱軸承

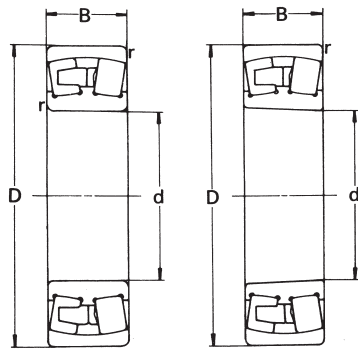

222R
圓柱孔

222RK
圓錐孔
錐度 1 : 12



222RW33
附有一條油槽和
三個油孔

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	222R	222RK
22208R	22208RK	40	80	23	1.1	6990	8000	5000	6700	0.550	0.540
09R	09RK	45	85	23	1.1	7260	8610	4600	6200	0.607	0.595
10R	10RK	50	90	23	1.1	8100	10200	4300	5700	0.650	0.637
11R	11RK	55	100	25	1.5	11000	13200	3800	5100	0.879	0.863
22212R	22212RK	60	110	28	1.5	13200	16200	3500	4700	1.21	1.19
13R	13RK	65	120	31	1.5	15200	19400	3200	4200	1.58	1.55
14R	14RK	70	125	31	1.5	16500	21200	3000	4000	1.67	1.64
15R	15RK	75	130	31	1.5	17000	22500	2900	3800	1.76	1.72
22216R	22216RK	80	140	33	2	20500	25400	2700	3500	2.16	2.12
17R	17RK	85	150	36	2	22800	29100	2500	3300	2.75	2.68
18R	18RK	90	160	40	2	25100	33700	2300	3100	3.55	3.48
19R	19RK	95	170	43	2.1	30200	39300	2200	2900	4.31	4.21
22220R	22220RK	100	180	46	2.1	34100	46200	2100	2800	5.16	5.06
22R	22RK	110	200	53	2.1	41900	56400	1900	2500	7.40	7.25
24R	24RK	120	215	58	2.1	50200	68600	1700	2300	9.30	9.10
26R	26RK	130	230	64	3	58000	80400	1600	2100	11.7	11.4
22228R	22228RK	140	250	68	3	67100	94700	1400	1900	15.0	14.7
30R	30RK	150	270	73	3	73400	104000	1300	1800	18.5	18.1
32R	32RK	160	290	80	3	90200	130000	1200	1600	23.4	22.9
34R	34RK	170	310	86	4	97000	142000	1100	1500	29.0	28.4
22236R	22236RK	180	320	86	4	99700	148000	1100	1400	30.5	29.8
38R	38RK	190	340	92	4	113000	176000	1000	1300	37.4	36.6
40R	40RK	200	360	98	4	125000	197000	930	1200	45.0	44.0
44R	44RK	220	400	108	4	160000	245000	820	1100	63.0	61.7
22248R	22248RK	240	440	120	4	195000	300000	730	970	85.0	83.2
52R	52RK	260	480	130	5	228000	353000	650	870	110	108
56R	56RK	280	500	130	5	215000	345000	610	810	114	112
60R	60RK	300	540	140	5	274000	441000	550	740	145	142