




22200RH 系統

球面滾柱軸承

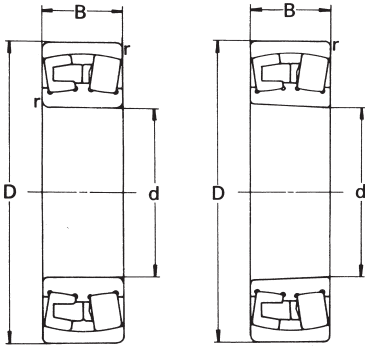

222
圓柱孔

222K
圓錐孔
錐度 1 : 12



222W33
附有一條油槽和
三個油孔

軸 承 型 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	222	222K
22208RH	22208RHK	40	80	23	1.1	7470	8350	4500	6000	0.550	0.540
09RH	09RHK	45	85	23	1.1	7780	9030	4200	5600	0.607	0.595
10RH	10RHK	50	90	23	1.1	8410	10200	3900	5200	0.650	0.637
11RH	11RHK	55	100	25	1.5	10600	12600	3400	4600	0.879	0.863
22212RH	22212RHK	60	110	28	1.5	13000	15700	3100	4200	1.21	1.19
13RH	13RHK	65	120	31	1.5	15500	18800	2900	3800	1.58	1.55
14RH	14RHK	70	125	31	1.5	16100	20600	2700	3600	1.67	1.64
15RH	15RHK	75	130	31	1.5	16700	21900	2600	3400	1.76	1.72
22216RH	22216RHK	80	140	33	2	20100	24800	2400	3200	2.16	2.12
17RH	17RHK	85	150	36	2	22600	28700	2200	3000	2.75	2.68
18RH	18RHK	90	160	40	2	25800	34700	2100	2800	3.55	3.48
19RH	19RHK	95	170	43	2.1	30200	39400	2000	2600	4.31	4.21
22220RH	22220RHK	100	180	46	2.1	33700	44500	1900	2500	5.16	5.06
22RH	22RHK	110	200	53	2.1	42900	57900	1700	2200	7.40	7.25
24RH	24RHK	120	215	58	2.1	49800	70900	1500	2000	9.30	9.10
26RH	26RHK	130	230	64	3	59200	83500	1400	1900	11.7	11.4
22228RH	22228RHK	140	250	68	3	68400	96800	1300	1700	15.0	14.7
30RH	30RHK	150	270	73	3	77600	111000	1200	1600	18.5	18.1
32RH	32RHK	160	290	80	3	91500	135000	1200	1600	23.4	22.9
34RH	34RHK	170	310	86	4	102000	152000	1100	1500	29.0	28.4
22236RH	22236RHK	180	320	86	4	108000	164000	1100	1400	30.5	29.8
38RH	38RHK	190	340	92	4	117000	180000	1000	1300	37.4	36.6
40RH	40RHK	200	360	98	4	133000	207000	940	1300	45.0	44.0
44RH	44RHK	220	400	108	4	162000	249000	820	1100	63.0	61.7
22248RH	22248RHK	240	440	120	4	196000	305000	730	970	85.0	83.2
52RH	52RHK	260	480	130	5	227000	350000	650	870	110	108
56RH	56RHK	280	500	130	5	236000	374000	610	810	114	112
60RH	60RHK	300	540	140	5	271000	445000	550	740	145	142