




23000R 系統

球面滾柱軸承

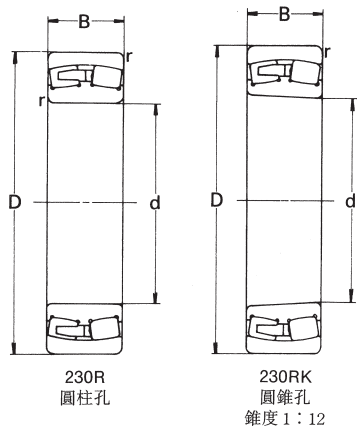

軸 型	承 號	主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
		d	D	B	r _s 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	230R	230RK
23024R	23024RK	120	180	46	2	30400	52700	1900	2600	4.35	4.22
26R	26RK	130	200	52	2	38400	66700	1700	2300	6.17	5.99
28R	28RK	140	210	53	2	43600	75100	1600	2200	6.87	6.67
30R	30RK	150	225	56	2.1	47700	82800	1500	2000	8.25	8.01
23032R	23032RK	160	240	60	2.1	55000	96200	1400	1900	10.2	9.9
34R	34RK	170	260	67	2.1	62100	113000	1300	1700	13.4	13.0
36R	36RK	180	280	74	2.1	72400	132000	1200	1600	17.6	17.1
38R	38RK	190	290	75	2.1	75100	140000	1100	1500	18.8	18.5
23040R	23040RK	200	310	82	2.1	90800	170000	1000	1400	24.1	23.4
44R	44RK	220	340	90	3	100000	193000	940	1300	31.5	30.6
48R	48RK	240	360	92	3	112000	221000	860	1100	34.9	33.9
52R	52RK	260	400	104	4	136000	262000	760	1000	50.7	49.3
23056R	23056RK	280	420	106	4	146000	292000	710	950	54.5	52.9
60R	60RK	300	460	118	4	178000	355000	630	840	75.8	73.7
64R	64RK	320	480	121	4	187000	382000	590	790	81.2	78.8
68R	68RK	340	520	133	5	217000	441000	530	710	108	105
23072R	23072RK	360	540	134	5	232000	489000	500	660	115	111
76R	76RK	380	560	135	5	237000	507000	470	630	122	118
80R	80RK	400	600	148	5	276000	591000	420	560	155	151
84R	84RK	420	620	150	5	285000	624000	400	530	164	159
23088R	23088RK	440	650	157	6	309000	667000	370	500	188	183
92R	92RK	460	680	163	6	331000	731000	340	460	215	209
96R	96RK	480	700	165	6	341000	769000	320	430	225	217
/500R	500RK	500	720	167	6	365000	825000	310	410	235	227