




23000RH 系統
球面滾柱軸承

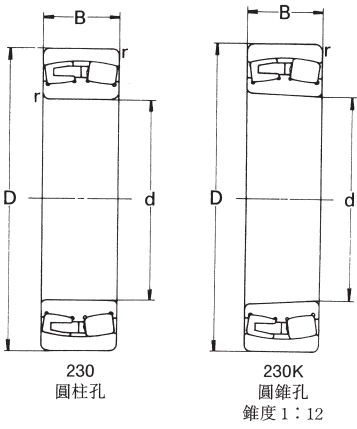

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	230	230K
23024RH	23024RHK	120	180	46	2	31000	51100	1700	2300	4.35	4.22
26RH	26RHK	130	200	52	2	39100	66600	1600	2100	6.17	5.99
28RH	28RHK	140	210	53	2	41800	71100	1500	2000	6.87	6.67
30RH	30RHK	150	225	56	2.1	46300	79700	1400	1800	8.25	8.01
23032RH	23032RHK	160	240	60	2.1	52100	89500	1300	1700	10.2	9.9
34RH	34RHK	170	260	67	2.1	64100	114000	1200	1600	13.4	13.0
36RH	36RHK	180	280	74	2.1	76400	135000	1100	1400	17.6	17.1
38RH	38RHK	190	290	75	2.1	80500	146000	1100	1500	18.8	18.5
23040RH	23040RHK	200	310	82	2.1	95900	172000	1100	1400	24.1	23.4
44RH	44RHK	220	340	90	3	111000	199000	940	1200	31.5	30.6
48RH	48RHK	240	360	92	3	119000	222000	860	1100	34.9	33.9
52RH	52RHK	260	400	104	4	150000	277000	760	1000	50.7	49.3
23056RH	23056RHK	280	420	106	4	158000	301000	700	940	54.5	52.9
60RH	60RHK	300	460	118	4	198000	378000	630	840	75.8	73.7
64RH	64RHK	320	480	121	4	202000	393000	590	780	81.2	78.8
68RH	68RHK	340	520	133	5	238000	456000	530	710	108	105
23072RH	23072RHK	360	540	134	5	247000	487000	500	660	115	111
76RH	76RHK	380	560	135	5	257000	518000	460	620	122	118
80RH	80RHK	400	600	148	5	299000	598000	420	560	155	151
84RH	84RHK	420	620	150	5	311000	635000	400	530	164	159
23088RH	23088RHK	440	650	157	6	343000	704000	370	490	188	183
92RH	92RHK	460	680	163	6	367000	758000	340	460	215	209
96RH	96RHK	480	700	165	6	380000	802000	320	430	225	217
/500RH	/500RHK	500	720	167	6	365000	825000~	310	410	235	227