




23900R 系統

球面滾柱軸承

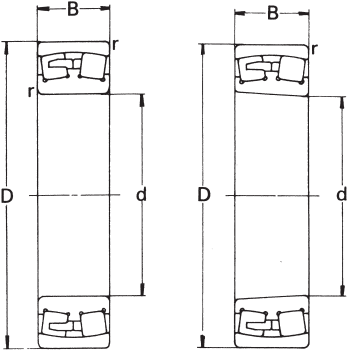

239
圓柱孔

239K
圓錐孔
錐度 1 : 12



239W33
附有一條油槽和
三個油孔

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _o	靜負荷 C _o	脂潤滑	油潤滑	239	239K
23936R	23936K	180	250	52	2	48800	95700	1300	1700	8.0	7.8
38R	38K	190	260	52	2	49600	98800	1200	1600	8.4	8.1
40R	40K	200	280	60	2.1	61300	121000	1100	1500	12.0	11.6
44R	44K	220	300	60	2.1	64600	133000	1000	1400	13.1	12.7
23948R	23948K	240	320	60	2.1	66400	141000	940	1300	14.0	13.5
52R	52K	260	360	75	2.1	93200	192000	820	1100	24.0	23.3
56R	56K	280	380	75	2.1	94700	199000	760	1000	26.4	25.6
60R	60K	300	420	90	3	131000	267000	680	910	40.0	38.8
23964R	23964K	320	440	90	3	136000	293000	630	840	43.0	41.7
68R	68K	340	460	90	3	138000	304000	590	790	44.7	43.3
72R	72K	360	480	90	3	139000	312000	550	730	47	45.5
76R	76K	380	520	106	4	181000	402000	500	660	70	67.9
23980R	23980K	400	540	106	4	192000	438000	470	620	73	70.7
84R	84K	420	560	106	4	192000	441000	430	580	76	73.6
88R	88K	440	600	118	4	238000	544000	400	530	101	97.6
92R	92K	460	620	118	4	238000	546000	370	500	107	104
23996R	23996K	480	650	128	5	268000	625000	350	460	123	119
/500R	/500K	500	670	128	5	272000	643000	330	440	131	127
/530R	/530K	530	710	136	5	304000	726000	300	400	157	152
/560R	/560K	560	750	140	5	317000	750000	270	360	182	176
239/600R	239/600K	600	800	150	5	360000	872000	240	320	218	212
/630R	/630K	630	850	165	6	413000	987000	210	290	277	269
/670R	/670K	670	900	170	6	452000	1100000	190	260	317	308
/710R	/710K	710	950	180	6	525000	1320000	180	230	375	364
239/750R	239/750K	740	1000	185	6	537000	1340000	160	210	404	390
/800R	/800K	800	1060	195	6	605000	1550000	140	190	471	455
/850R	/850K	850	1120	200	6	654000	1700000	120	170	531	514
/900R	/900K	900	1180	206	6	699000	1840000	110	150	599	579