





24000R 系統

球面滾柱軸承

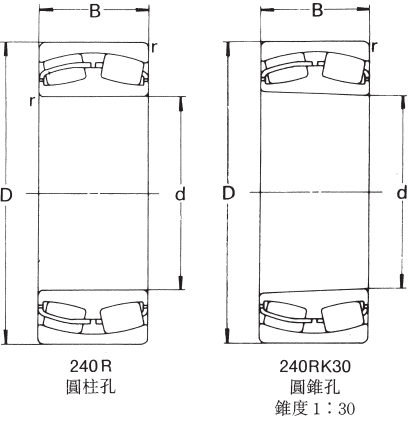

240RW33
附有一條油槽和
三個油孔

軸 承 型 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	240R	240RK30
24024R	24024RK30	120	180	60	2	37200	63900	1700	2300	5.40	5.32
26R	26RK30	130	200	69	2	47800	81900	1600	2100	7.95	7.85
28R	28RK30	140	210	69	2	49100	83500	1500	2000	8.44	8.33
30R	30RK30	150	225	75	2.1	52800	94300	1400	1800	10.5	10.4
24032R	24032RK30	160	240	80	2.1	63300	113000	1300	1700	12.8	12.6
34R	34RK30	170	260	90	2.1	75200	135000	1200	1600	17.4	17.1
36R	36RK30	180	280	100	2.1	89900	162000	1100	1400	22.9	22.6
38R	38RK30	190	290	100	2.1	92400	167000	1000	1400	24.0	23.6
24040R	24040RK30	200	310	109	2.1	105000	194000	950	1300	30.5	30.1
44R	44RK30	220	340	118	3	126000	235000	850	1100	39.6	39.0
48R	48RK30	240	360	118	3	134000	258000	780	1000	42.4	41.8
52R	52RK30	260	400	140	4	172000	331000	690	920	64.6	63.7
24056R	24056RK30	280	420	140	4	177000	349000	640	850	68.5	67.6
60R	60RK30	300	460	160	4	229000	446000	570	760	97.1	95.5
64R	64RK30	320	480	160	4	235000	469000	530	710	100	98.0
68R	68RK30	340	520	180	5	269000	528000	480	640	139	137
24072R	24072RK30	360	540	180	5	289000	586000	450	600	145	143
76R	76RK30	380	560	180	5	296000	614000	420	560	152	149
80R	80RK30	400	600	200	5	391000	827000	430	570	206	203
84R	84RK30	420	620	200	5	366000	775000	400	530	212	209
24088R	24088RK30	440	650	212	6	399000	848000	370	490	247	243
92R	92RK30	460	680	218	6	466000	1030000	340	460	277	272
96R	96RK30	480	700	218	6	451000	984000	320	430	287	282
/500R	/500RK30	500	720	218	6	469000	1050000	310	410	297	292