




24000RH 系統 球面滾柱軸承

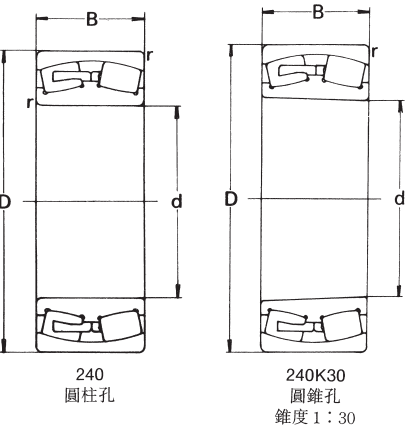

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	240	240K30
24024RH	24024K30	120	180	60	2	40400	72300	1700	2300	5.40	5.32
26RH	26K30	130	200	69	2	52200	93200	1600	2100	7.95	7.85
28RH	28K30	140	210	69	2	53400	97600	1500	2000	8.44	8.33
30RH	30K30	150	225	75	2.1	60400	112000	1400	1800	10.5	10.4
24032RH	24032K30	160	240	80	2.1	69200	129000	1300	1700	12.8	12.6
34RH	34K30	170	260	90	2.1	84000	157000	1200	1600	17.4	17.1
36RH	36K30	180	280	100	2.1	100000	186000	1100	1400	22.9	22.6
38RH	38K30	190	290	100	2.1	103000	195000	1100	1500	24.0	23.6
24040RH	24040K30	200	310	109	2.1	120000	227000	1100	1400	30.5	30.1
44RH	44K30	220	340	118	3	140000	268000	950	1300	39.6	39.0
48RH	48K30	240	360	118	3	146000	290000	870	1200	42.4	41.8
52RH	52K30	260	400	140	4	190000	374000	770	1000	64.6	63.7
24056RH	24056K30	280	420	140	4	200000	408000	710	950	68.5	67.6
60RH	60K30	300	460	160	4	247000	501000	640	850	97.1	95.5
64RH	64K30	320	480	160	4	256000	533000	590	790	100	98
68RH	68K30	340	520	180	5	310000	645000	530	710	139	137
24072RH	24072K30	360	540	180	5	318000	675000	500	660	145	143
76RH	76K30	380	560	180	5	325000	704000	470	620	152	149
80RH	80K30	400	600	200	5	385000	830000	420	570	206	203
84RH	84K30	420	620	200	5	395000	866000	400	530	212	209
24088RH	24088K30	440	650	212	6	442000	975000	370	490	247	243
92RH	92K30	460	680	218	6	473000	1050000	340	460	277	272
96RH	96K30	480	700	218	6	484000	1100000	320	430	287	282
/500RH	/500K30	500	720	218	6	469000	1050000	310	410	297	292