




24100RH 系統

球面滾柱軸承

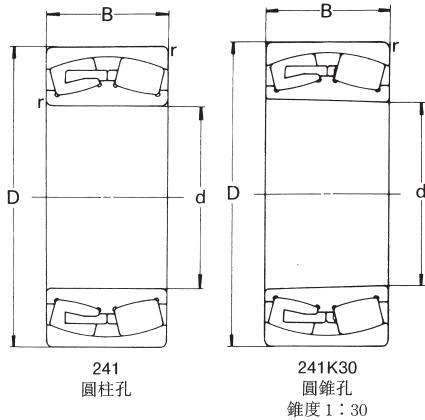

軸 承 型 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	241	241K30
24122RH	24122K30	110	180	69	2	47800	79300	1800	2400	6.85	6.76
24RH	24K30	120	200	80	2	61600	104000	1600	2200	10.1	10.0
26RH	26K30	130	210	80	2	63200	110000	1500	2000	10.8	10.6
28RH	28K30	140	225	85	2.1	71600	125000	1400	1900	12.9	12.7
24130RH	24130K30	150	250	100	2.1	93300	162000	1300	1700	19.6	19.3
32RH	32K30	160	270	109	2.1	109000	193000	1200	1600	25.2	24.9
34RH	34K30	170	280	109	2.1	111000	198000	1100	1500	26.6	26.2
36RH	36K30	180	300	118	3	127000	228000	1100	1500	33.3	32.7
24138RH	24138K30	190	320	128	3	148000	269000	1000	1400	42.0	41.2
40RH	40K30	200	340	140	3	169000	303000	990	1300	51.9	51.0
44RH	44K30	220	370	150	4	196000	362000	880	1200	65.0	64.0
48RH	48K30	240	400	160	4	225000	421000	800	1100	80.3	79.0
24152RH	24152K30	260	440	180	4	270000	504000	720	950	111	110
56RH	56K30	280	460	180	5	279000	534000	660	880	118	116
60RH	60K30	300	500	200	5	339000	654000	590	790	157	155
64RH	64K30	320	540	218	5	383000	733000	530	710	209	206
24168RH	24168K30	340	580	243	5	463000	899000	490	650	271	267
72RH	72K30	360	600	243	5	469000	937000	460	610	287	283
76RH	76K30	380	620	243	5	493000	1000000	420	560	302	297
80RH	80K30	400	650	250	6	528000	1080000	390	520	338	333
24184RH	24184K30	420	700	280	6	624000	1260000	350	470	445	440
88RH	88K30	440	720	280	6	632000	1310000	330	440	460	455
92RH	92K30	460	760	300	7.5	705000	1450000	310	410	550	544