

Transformed Rhombic Flange Units



UCFA type

With setscrews

Cylindrical bore

Shaft dia.:

12~55mm

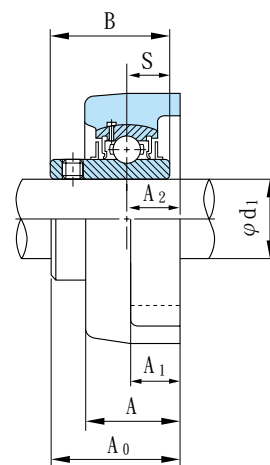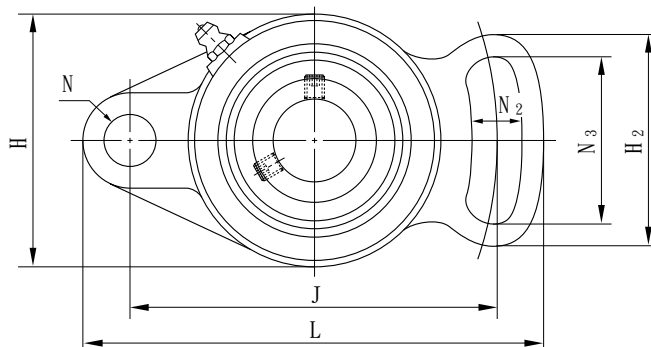

軸徑 (mm)	連座 軸承 型番	主要寸法 (mm)													安裝 螺栓 型番
		H	H ₂	L	A	J	N	N ₂	N ₃	A ₁	A ₂	A ₀	B	S	
12	UCFA 201	60	54	102	25.5	78	10	10	40	12	15	33.3	31	12.7	M 8
15	UCFA 202	60	54	102	25.5	78	10	10	40	12	15	33.3	31	12.7	M 8
17	UCFA 203	60	54	102	25.5	78	10	10	40	12	15	33.3	31	12.7	M 8
20	UCFA 204	60	54	102	25.5	78	10	10	40	12	15	33.3	31	12.7	M 8
25	UCFA 205	68	65	125	27	98	12	13	51	14	16	35.7	34	14.3	M 10
30	UCFA 206	80	72	144	31	117	12	13	58	14	18	40.2	38.1	15.9	M 10
35	UCFA 207	90	82	161	34	130	14	15	66	16	19	44.4	42.9	17.5	M 12
40	UCFA 208	100	87	175	36	144	14	15	71	16	21	51.2	49.2	19	M 12
45	UCFA 209	108	90	181	38	148	16	17	72	18	22	52.2	49.2	19	M 14
50	UCFA 210	115	94	190	40	157	16	17	76	18	22	54.6	51.6	19	M 14
55	UCFA 211	130	104	219	43	184	16	17	86	20	25	58.4	55.6	22.2	M 14

Remark: Grease nipple: 1/4-28UNF

1N=0.102kgf

軸 承 部 份			軸承座 型番	總重量 (kg)
型 番	基本額定荷重(N)			
	Cr	Cor		
UC 201	12800	6600	FA 204	0.50
UC 202	12800	6600	FA 204	0.49
UC 203	12800	6600	FA 204	0.48
UC 204	12800	6600	FA 204	0.46
UC 205	14000	7900	FA 205	0.66
UC 206	19600	11300	FA 206	1.0
UC 207	25900	15400	FA 207	1.4
UC 208	29300	17900	FA 208	1.7
UC 209	33000	20500	FA 209	2.0
UC 210	35500	23200	FA 210	2.4
UC 211	43000	29400	FA 211	3.4