





22300R 系統

球面滾柱軸承

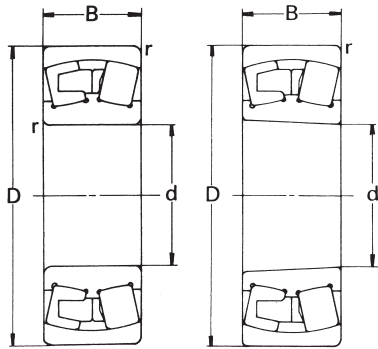

223R
圓柱孔

223RK
圓錐孔
錐度 1 : 12



223RW33
附有一條油槽和
三個油孔

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	223R	223RK
22308R	22308RK	40	90	33	1.5	11700	12600	4600	6100	0.994	0.974
09R	09RK	45	100	36	1.5	13700	15000	4100	5500	1.53	1.32
10R	10RK	50	110	40	2	17600	19600	3700	4900	1.81	1.77
11R	11RK	55	120	43	2	20900	24600	3300	4400	2.33	2.28
22312R	22312RK	60	130	46	2.1	24400	28400	3100	4100	2.91	2.85
13R	13RK	65	140	48	2.1	26800	31500	2800	3800	3.48	3.40
14R	14RK	70	150	51	2.1	31700	37100	2600	3500	4.20	4.11
15R	15RK	75	160	55	2.1	34900	42000	2500	3300	5.23	5.12
22316R	22316RK	80	170	58	2.1	40000	48900	2300	3100	6.15	6.01
17R	17RK	85	180	60	3	40500	49000	2200	2900	7.14	6.99
18R	18RK	90	190	64	3	46700	56700	2100	2800	8.49	8.30
19R	19RK	95	200	67	3	51400	63500	1900	2600	9.94	9.72
22320R	22320RK	100	215	73	3	59100	72700	1800	2400	12.5	12.2
22R	22RK	110	240	80	3	72700	90200	1600	2200	18.1	17.7
24R	24RK	120	260	86	3	82800	107000	1500	2000	22.9	22.4
26R	26RK	130	280	93	4	96600	122000	1400	1800	28.6	28.0
22328R	22328RK	140	300	102	4	112000	144000	1300	1700	36.2	35.5
30R	30RK	150	320	108	4	126000	163000	1200	1500	43.6	42.8
32R	32RK	160	340	114	4	140000	183000	1100	1400	51.9	51.0
34R	34RK	170	360	120	4	149000	196000	1000	1300	62.0	60.8
22336R	22336RK	180	380	126	4	178000	240000	920	1200	71.4	69.9
38R	38RK	190	400	132	5	194000	266000	880	1200	84.1	82.4
40R	40RK	200	420	138	5	205000	280000	830	1100	95.4	93.5
44R	44RK	220	460	145	5	243000	345000	720	960	124	122
22348R	22348RK	240	500	155	5	266000	410000	650	870	157	154
52R	52RK	260	540	165	6	289000	446000	590	780	196	192
56R	56RK	280	580	175	6	321000	501000	530	710	229	225