





23100R 系統

球面滾柱軸承

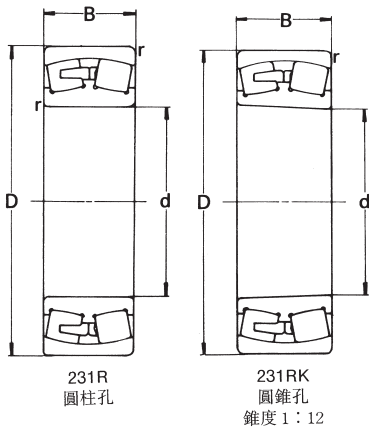

231RW33
附有一條油槽和
三個油孔

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	231R	231RK
23122R	23122RK	110	180	56	2	35300	60300	2000	2700	5.76	5.58
24R	24RK	120	200	62	2	45500	77500	1800	2400	8.33	8.09
26R	26RK	130	210	64	2	51600	84200	1700	2200	9.10	8.82
28R	28RK	140	225	68	2.1	57200	95200	1500	2100	10.8	10.5
23130R	23130RK	150	250	80	2.1	70200	126000	1400	1900	16.4	15.9
32R	32RK	160	270	86	2.1	81200	141000	1300	1700	20.5	19.9
34R	34RK	170	280	88	2.1	90700	152000	1200	1600	22.4	21.7
36R	36RK	180	300	96	3	102000	183000	1100	1500	28.4	27.5
23138R	23138RK	190	320	104	3	111000	204000	1000	1400	35.5	34.4
40R	40RK	200	340	112	3	126000	230000	980	1300	43.7	42.4
44R	44RK	220	370	120	4	147000	275000	880	1200	54.8	53.2
48R	48RK	240	400	128	4	166000	314000	790	1100	67.6	65.6
23152R	23152RK	260	440	144	4	214000	394000	710	940	93.6	90.8
56R	56RK	280	460	146	5	218000	436000	660	880	100	98.9
60R	60RK	300	500	160	5	254000	495000	590	790	132	128
64R	64RK	320	540	176	5	296000	581000	530	700	171	166
23168R	23168RK	340	580	190	5	334000	656000	480	640	216	210
72R	72RK	360	600	192	5	385000	718000	440	590	228	221
76R	76RK	380	620	194	5	366000	747000	420	560	240	233
80R	80RK	400	650	200	6	419000	793000	390	520	273	266
23184R	23184RK	420	700	224	6	456000	929000	350	470	363	355
88R	88RK	440	720	226	6	514000	979000	330	440	378	366
92R	92RK	460	760	240	7.5	528000	1100000	310	410	450	436
96R	96RK	480	790	248	7.5	555000	1170000	280	380	503	488
/500R	/500RK	500	830	264	7.5	629000	1320000	260	350	595	577