





23100RH 系統

球面滾柱軸承

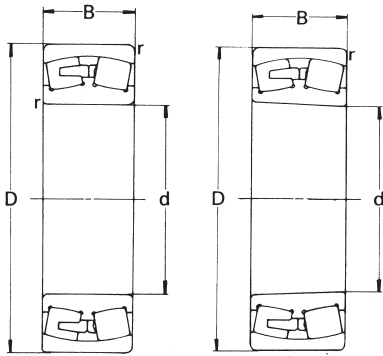

231
圓柱孔

231K
圓錐孔
錐度 1 : 12



231W33
附有一條油槽和
三個油孔

軸 承 型 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	231	231K
23122RH	23122RHK	110	180	56	2	39300	61700	1800	2400	5.76	5.58
24RH	24RHK	120	200	62	2	46300	72800	1600	2200	8.33	8.09
26RH	26RHK	130	210	64	2	50400	81500	1500	2000	9.10	8.82
28RH	28RHK	140	225	68	2.1	57600	95800	1400	1900	10.8	10.5
23130RH	23130RHK	150	250	80	2.1	73200	126000	1300	1700	16.4	15.9
32RH	32RHK	160	270	86	2.1	86500	146000	1200	1600	20.5	19.9
34RH	34RHK	170	280	88	2.1	93400	158000	1100	1500	22.4	21.7
36RH	36RHK	180	300	96	3	108000	183000	1100	1500	28.4	27.5
23138RH	23138RHK	190	320	104	3	124000	212000	1000	1400	35.5	34.4
40RH	40RHK	200	340	112	3	141000	239000	970	1300	43.7	42.4
44RH	44RHK	220	370	120	4	162000	284000	870	1200	54.8	53.2
48RH	48RHK	240	400	128	4	185000	326000	790	1000	67.6	65.6
23152RH	23152RHK	260	440	144	4	226000	408000	700	930	93.6	40.8
56RH	56RHK	280	460	146	5	239000	438000	650	870	100	98.9
60RH	60RHK	300	500	160	5	278000	507000	580	780	132	128
64RH	64RHK	320	540	176	5	328000	608000	530	700	171	166
23168RH	23168RHK	340	580	190	5	392000	735000	480	640	216	210
72RH	72RHK	360	600	192	5	392000	735000	450	590	228	221
76RH	76RHK	380	620	194	5	408000	786000	420	560	240	233
80RH	80RHK	400	650	200	6	439000	847000	390	520	273	266
23184RH	23184RHK	420	700	224	6	514000	982000	350	470	363	355
88RH	88RHK	440	720	226	6	535000	1050000	330	440	378	366
92RH	92RHK	460	760	240	7.5	587000	1140000	300	400	450	436
96RH	96RHK	480	790	248	7.5	628000	1230000	280	380	503	488
/500RH	/500RHK	500	830	264	7.5	629000	1320000	260	350	595	577