


Pillow Block Units

UKP+H type

With adapter assembly

Tapered bore

Shaft dia.: 20~60mm

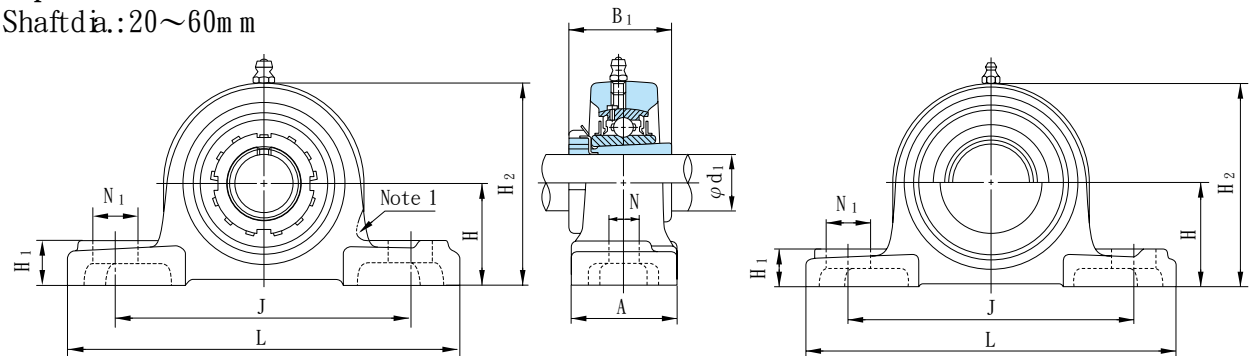


Note: The line shows figure of UCPX00 series

With steel cover

軸徑 (mm)	連 座 軸 承 型 番	主 要 寸 法 (mm)															安 裝 螺 栓 型 番	
		H	L	A	J	N	N ₁	H ₁	H ₂	H ₅	B ₁	A ₄	A ₅	A ₆	A ₇			
20	UKP205+H2305	36.5	140	38	105	13	16	16	70	76	35	63	70	11	9	M 10		
	UKPX05+H2305	44.4	159	51	119	17	25	18	85	—	35	65	—	10	—	M 14		
	UKP305+H2305	45	175	45	132	17	20	16	84	89	35	—	78	—	12	M 14		
25	UKP206+H2306	42.9	165	48	121	17	21	18	83	87	38	65	74	10	10	M 14		
	UKPX06+H2306	47.6	175	57	127	17	25	20	94	—	38	70	—	12	—	M 14		
	UKP306+H2306	50	180	50	140	17	20	19	94	99	38	—	84	—	13	M 14		
30	UKP207+H2307	47.6	167	48	127	17	21	19	94	97	43	70	80	11	11	M 14		
	UKPX07+H2307	54	203	57	144	17	30	22	105	—	43	83	—	17	—	M 14		
	UKP307+H2307	56	210	56	160	17	25	21	105	110	43	—	90	—	14	M 14		
35	UKP208+H2308	49.2	184	54	137	17	25	19	100	104	46	82	90	15	14	M 14		
	UKPX08+H2308	58.7	222	67	156	20	32	26	113	—	46	82	—	15	—	M 16		
	UKP308+H2308	60	220	60	170	17	27	23	116	122	46	—	100	—	17	M 14		
40	UKP209+H2309	54	190	54	146	17	22	20	108	114	50	82	90	14	13	M 14		
	UKPX09+H2309	58.7	222	67	156	20	33	26	116	—	50	87	—	16	—	M 16		
	UKP309+H2309	67	245	67	190	20	30	25	128	136	50	—	106	—	17	M 16		
45	UKP210+H2310	57.2	206	60	159	20	25	22	114	120	55	87	98	15	15	M 16		
	UKPX10+H2310	63.5	241	73	171	20	36	27	126	—	55	88	—	14	—	M 16		
	UKP310+H2310	75	275	75	212	20	35	28	143	149	55	—	114	—	19	M 16		
50	UKP211+H2311	63.5	219	60	171	20	25	22	126	133	59	88	100	14	15	M 16		
	UKPX11+H2311	69.8	260	79	184	25	36	30	139	—	59	100	—	19	—	M 20		
	UKP311+H2311	80	310	80	236	20	38	31	154	159	59	—	120	—	20	M 16		
55	UKP212+H2312	69.8	241	70	184	20	25	25	138	145	62	102	114	19	20	M 16		
	UKPX12+H2312	76.2	286	83	203	25	41	32	151	—	62	104	—	19	—	M 20		
	UKP312+H2312	85	330	85	250	25	38	33	165	169	62	—	130	—	23	M 20		
60	UKP213+H2313	76.2	265	70	203	25	29	27	150	156	65	102	118	17	20	M 20		
	UKPX13+H2313	76.2	286	83	203	25	41	32	154	—	65	—	—	—	—	M 20		
	UKP313+H2313	90	340	90	260	25	38	36	174	188	65	—	140	—	24	M 20		

Remarks: 1. Grease nipple: 1/4-28UNF

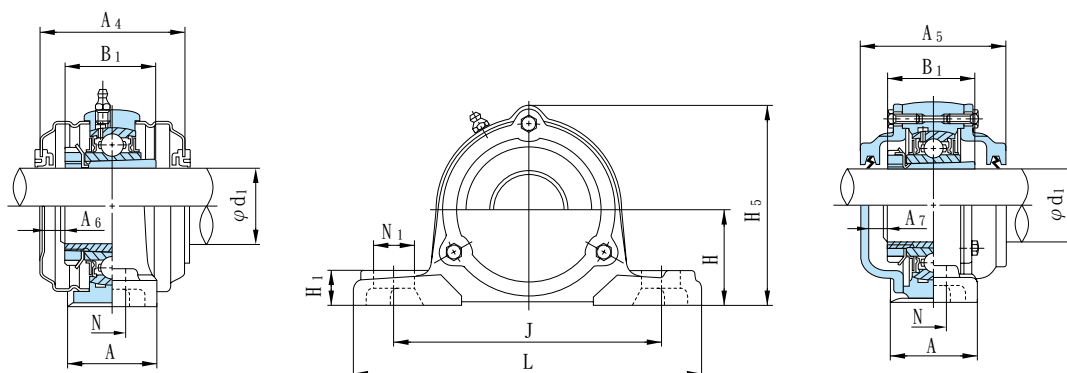

With cast covers

1N=0.102kgf

	軸 承 部 份			軸承座 型番	UnitNo. w ith steel covers	UnitNo. w ith cast covers	附 鑄		
	型 番	基本額定荷重(N)			Covers w ith rubber seal (End cover on one side)	Covers w ith rubber seal (End cover on one side)	標準	附鋼製 外蓋	附鑄鐵 外蓋
		Cr	Cor						
	UK205+H2305	14000	7900	P205	UKP205C (E)+H2305	CUKP205C (CE)+H2305	0.84	0.91	1.4
	UKX05+H2305	19600	11300	PX05	UKPX05C (E)+H2305	—	1.5	1.5	—
	UK305+H2305	21300	10900	P305	—	CUKP305C (CE)+H2305	1.6	—	2.1
	UK206+H2306	19600	11300	P206	UKP206C (E)+H2306	CUKP206C (CE)+H2306	1.4	1.5	2.1
	UKX06+H2306	25900	15400	PX06	UKPX06C (E)+H2306	—	2.0	2.0	—
	UK306+H2306	26800	15000	P306	—	CUKP306C (CE)+H2306	1.9	—	2.6
	UK207+H2307	25900	15400	P207	UKP207C (E)+H2307	CUKP207C (CE)+H2307	1.6	1.8	2.6
	UKX07+H2307	29300	17900	PX07	UKPX07C (E)+H2307	—	2.7	2.7	—
	UK307+H2307	33500	19200	P307	—	CUKP307C (CE)+H2307	2.7	—	3.5
	UK208+H2308	29300	17900	P208	UKP208C (E)+H2308	CUKP208C (CE)+H2308	2.1	2.3	3.1
	UKX08+H2308	33000	20500	PX08	UKPX08C (E)+H2308	—	3.5	3.5	—
	UK308+H2308	40500	23900	P308	—	CUKP308C (CE)+H2308	3.0	—	4.4
	UK209+H2309	33000	20500	P209	UKP209C (E)+H2309	CUKP209C (CE)+H2309	2.4	2.6	3.5
	UKX09+H2309	35500	23200	PX09	UKPX09C (E)+H2309	—	3.5	3.6	—
	UK309+H2309	51500	29500	P309	—	CUKP309C (CE)+H2309	4.6	—	5.9
	UK210+H2310	35500	23200	P210	UKP210C (E)+H2310	CUKP210C (CE)+H2310	2.8	3.2	4.2
	UKX10+H2310	43000	29400	PX10	UKPX10C (E)+H2310	—	4.3	4.5	—
	UK310+H2310	61500	38200	P310	—	CUKP310C (CE)+H2310	6.2	—	7.8
	UK211+H2311	43000	29400	P211	UKP211C (E)+H2311	CUKP211C (CE)+H2311	3.4	3.8	5.1
	UKX11+H2311	52500	36100	PX11	UKPX11C (E)+H2311	—	5.8	6.0	—
	UK311+H2311	71500	44800	P311	—	CUKP311C (CE)+H2311	7.6	—	9.6
	UK212+H2312	52500	36100	P212	UKP212C (E)+H2312	CUKP212C (CE)+H2312	4.8	5.2	6.8
	UKX12+H2312	57500	40000	PX12	UKPX12C (E)+H2312	—	7.1	7.3	—
	UK312+H2312	81500	52000	P312	—	CUKP312C (CE)+H2312	9.3	—	11.7
	UK213+H2313	57500	40000	P213	UKP213C (E)+H2313	CUKP213C (CE)+H2313	5.7	6.2	7.9
	UKX13+H2313	62000	44000	PX13	—	—	7.2	—	—
	UK313+H2313	92500	59700	P313	—	CUKP313C (CE)+H2313	9.8	—	14.2

Remarks: 2. Examples of unit numbers with covers:

With steel cover { Covers with rubber seal on both sides : UKP210C+H2310
 { An end cover and a cover with rubber seal : UKP210E+H2310
 With cast covers { Covers with rubber seal on both sides : CUKP210C+H2310
 { An end cover and a cover with rubber seal : CUKP210CE+H2310


Pillow Block Units

UKP+H type

With adapter assembly

Tapered bore

Shaft dia.: 65~125mm

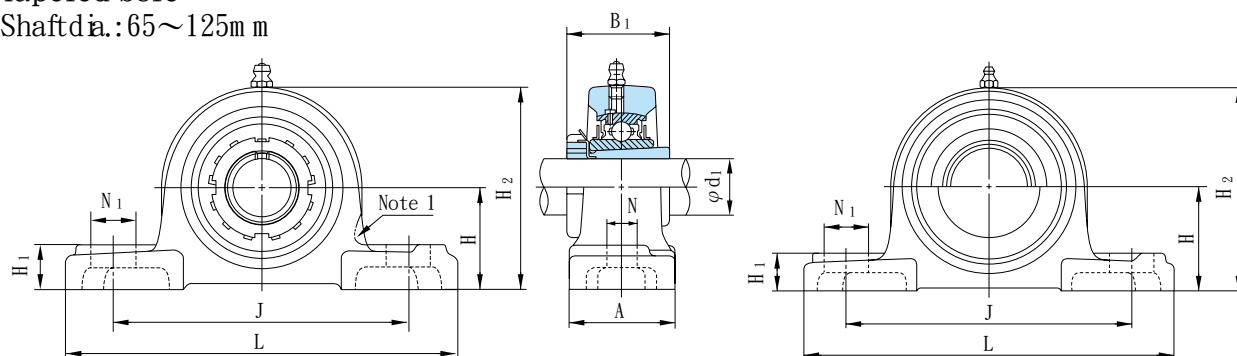


Note: The line shows figure of UC PX00 series

With steel cover

軸徑 (mm)	連座 軸承 No. 型番	主要寸法 (mm) _{1 m}															安裝 螺栓 型番	
		H	L	A	J	N	N ₁	H ₁	H ₂	H ₅	B ₁	A ₄	A ₅	A ₆	A ₇			
65	UKP215+H2315	82.6	275	74	217	25	31	28	163	167	73	—	136	—	26	M 20		
	UKPX15+H2315	88.9	330	89	229	27	51	35	177	—	73	—	—	—	—	M 22		
	UKP315+H2315	100	380	100	290	27	40	40	197	208	73	—	150	—	25	M 22		
70	UKP216+H2316	88.9	292	78	232	25	31	30	175	188	78	—	146	—	26	M 20		
	UKPX16+H2316	101.6	381	102	283	27	59	42	197	—	78	—	—	—	—	M 22		
	UKP316+H2316	106	400	110	300	27	40	45	209	219	78	—	154	—	23	M 22		
75	UKP217+H2317	95.2	310	83	247	25	31	32	187	199	82	—	150	—	26	M 20		
	UKPX17+H2317	101.6	381	102	283	27	59	42	202	—	82	—	—	—	—	M 22		
	UKP317+H2317	112	420	110	320	33	45	45	221	234	82	—	164	—	26	M 27		
80	UKP218+H2318	101.6	327	88	262	27	33	34	200	211	86	—	164	—	31	M 22		
	UKPX18+H2318	101.6	381	111	283	27	60	45	206	—	86	—	—	—	—	M 22		
	UKP318+H2318	118	430	110	330	33	45	50	233	245	86	—	168	—	26	M 27		
85	UKP319+H2319	125	470	120	360	36	50	50	250	257	90	—	180	—	30	M 30		
90	UKPX20+H2320	127	432	121	337	33	64	52	250	—	97	—	—	—	—	M 27		
	UKP320+H2320	140	490	120	380	36	50	55	275	282	97	—	190	—	31	M 30		
100	UKP322+H2322	150	520	140	400	40	55	60	295	305	105	—	210	—	36	M 33		
110	UKP324+H2324	160	570	140	450	40	55	70	321	328	112	—	220	—	35	M 33		
115	UKP326+H2326	180	600	140	480	40	55	80	354	358	121	—	230	—	36	M 33		
125	UKP328+H2328	200	620	140	500	40	55	80	388	388	131	—	240	—	37	M 33		

Remarks: 1. Grease nipple: PF1/8

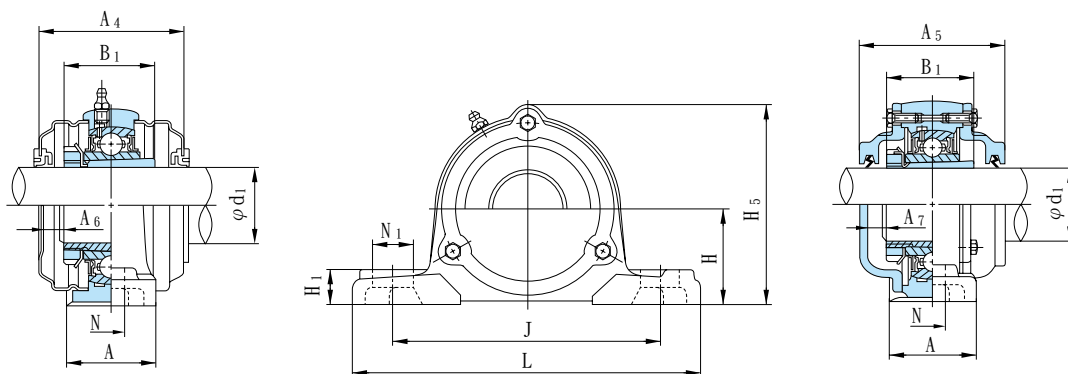

With cast covers

1N=0.102kgf

	軸 承 部 份			軸承座 型番	UnitNo. with steel covers	UnitNo. with cast covers	附鑄		
	型 番	基本額定荷重(N)			Covers with rubber seal (End cover on one side)	Covers with rubber seal (End cover on one side)	標準	附鋼製 外蓋	附鑄鐵 外蓋
		Cr	Cor						
	UK215+H2315	66000	48200	P215	—	CUKP215C (CE)+H2315	8.3	—	10.0
	UKX15+H2315	72500	53000	PX15	—	—	11.5	—	—
	UK315+H2315	114000	76900	P315	—	CUKP315C (CE)+H2315	13.7	—	19.9
	UK216+H2316	72500	53000	P216	—	CUKP216C (CE)+H2316	10.4	—	12.7
	UKX16+H2316	83500	61800	PX16	—	—	17.4	—	—
	UK316+H2316	123000	86400	P316	—	CUKP316C (CE)+H2316	16.6	—	23.9
	UK217+H2317	83500	61800	P217	—	CUKP217C (CE)+H2317	12.8	—	14.8
	UKX17+H2317	95500	71400	PX17	—	—	17.0	—	—
	UK317+H2317	132000	96500	P317	—	CUKP317C (CE)+H2317	18.6	—	27.1
	UK218+H2318	95500	71400	P218	—	CUKP218C (CE)+H2318	15.1	—	18.6
	UKX18+H2318	109000	81600	PX18	—	—	16.7	—	—
	UK318+H2318	143000	107200	P318	—	CUKP318C (CE)+H2318	21.1	—	30.9
	UK319+H2319	153000	118400	P319	—	CUKP319C (CE)+H2319	26.5	—	37.1
	UKX20+H2320	134000	104700	PX20	—	—	32.1	—	—
	UK320+H2320	173000	140400	P320	—	CUKP320C (CE)+H2320	34.3	—	45.2
	UK322+H2322	205000	178800	P322	—	CUKP322C (CE)+H2322	42.6	—	55.1
	UK324+H2324	207000	184800	P324	—	CUKP324C (CE)+H2324	53.0	—	73.8
	UK326+H2326	229000	214300	P326	—	CUKP326C (CE)+H2326	72.4	—	93.3
	UK328+H2328	255000	246000	P328	—	CUKP328C (CE)+H2328	89.4	—	111

Remarks: 2. Examples of unit numbers with covers:

With cast covers { Covers with rubber seal on both sides : CUKP215C+H2315
 { An end cover and a cover with rubber seal : CUKP215CE+H2315