




1200 系 統 自動調心球軸承

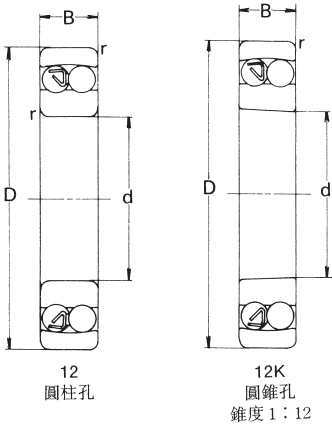

軸 承 型 號	主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數(rpm)		重量(kg)	
	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	12	12K
1200	10	30	9	0.6	550	120	23000	28000	0.034	—
01	12	32	10	0.6	570	130	21000	26000	0.040	—
02	15	35	11	0.6	760	180	18000	22000	0.049	—
03	17	40	12	0.6	805	205	16000	20000	0.073	—
1204(K)	20	47	14	1	1010	265	14000	17000	0.120	0.118
05(K)	25	52	15	1	1230	335	12000	14000	0.141	0.138
06(K)	30	62	16	1	1590	475	9900	12000	0.220	0.216
07(K)	35	72	17	1.1	1610	520	8500	10000	0.323	0.317
1208(K)	40	80	18	1.1	1960	665	7500	9200	0.417	0.411
09(K)	45	85	19	1.1	2220	750	7000	8500	0.465	0.459
10(K)	50	90	20	1.1	2310	825	6500	7900	0.525	0.515
11(K)	55	100	21	1.5	2730	1020	5800	7100	0.705	0.693
1212(K)	60	110	22	1.5	3080	1180	5200	6400	0.90	0.885
13(K)	65	120	23	1.5	3160	1280	4800	5800	1.15	1.13
14 —	70	125	24	1.5	3530	1410	4600	5700	1.26	—
15(K)	75	130	25	1.5	3960	1600	4300	5300	1.36	1.34
1216(K)	80	140	26	2	4060	1730	4000	4900	1.67	1.64
17(K)	85	150	28	2	5010	2120	3800	4600	2.07	2.04
18(K)	90	160	30	2	5520	2360	3500	4300	2.52	2.48
19(K)	95	170	32	2.1	5820	2480	3300	4000	3.10	3.05
1220(K)	100	180	34	2.1	7030	3030	3100	3800	3.70	3.64
21 —	105	190	36	2.1	7850	3470	2900	3600	4.37	—
22 —	110	200	38	2.1	8180	3590	2800	3400	5.15	5.07