


32300JR 系 統

錐形滾柱軸承

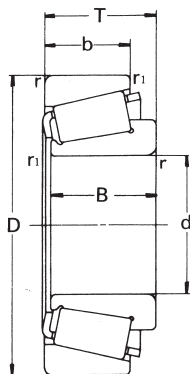

軸 承 型 號	主 要 尺 寸 (mm)							基本額定負荷 (kgf)		容許回轉數(rpm)		重量 (kg)
	d	D	B	b	T	r _s 最小	r _{1s} 最小	動負荷 C _e	靜負荷 C ₀	脂潤滑	油潤滑	
32303JR	17	47	19	16	20.25	1	1	3730	3660	9400	13000	0.167
04JR	20	52	21	18	22.25	1.5	1.5	4600	4760	8400	11000	0.226
05JR	25	62	24	20	25.25	1.5	1.5	6240	6530	6900	9100	0.353
06JR	30	72	27	23	28.75	1.5	1.5	8380	9340	5900	7900	0.535
32307JR	35	80	31	25	32.75	2	1.5	10300	11600	5300	7000	0.717
08JR	40	90	33	27	35.25	2	1.5	11800	14200	4600	6200	0.985
09JR	45	100	36	30	38.25	2	1.5	14900	18300	4100	5500	1.32
10JR	50	110	40	33	42.25	2.5	2	18000	22400	3700	5000	1.74
32311JR	55	120	43	35	45.5	2.5	2	20400	25500	3400	4500	2.23
12JR	60	130	46	37	48.5	3	2.5	24900	32100	3100	4200	2.75
13JR	65	140	48	39	51	3	2.5	28200	36400	2900	3900	3.34
14JR	70	150	51	42	54	3	2.5	32300	42300	2700	3600	4.09
32315JR	75	160	55	45	58	3	2.5	37000	49100	2500	3300	4.97
16JR	80	170	58	48	61.5	3	2.5	39100	51300	2300	3100	5.90
17JR	85	180	60	49	63.5	4	3	44700	59900	2200	3000	6.85
18JR	90	190	64	53	67.5	4	3	47000	62600	2100	2800	8.23
32319JR	95	200	67	55	71.5	4	3	52700	70900	2000	2600	11.0
20JR	100	215	73	60	77.5	4	3	59100	79900	1800	2400	14.0
21JR	105	225	77	63	81.5	4	3	64700	88300	1800	2300	14.0
22JR	110	240	80	65	84.5	4	3	70500	96100	1600	2200	16.7
24JR	120	260	86	69	90.5	4	3	81500	113000	1500	2000	24.0