




22300RH 系統 球面滾柱軸承

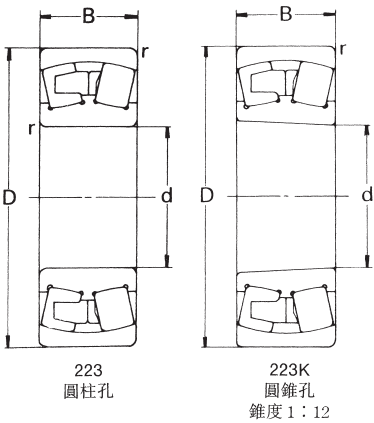

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	223	223K
22308RH	22308RHK	40	90	33	1.5	12300	13300	4100	5500	0.994	0.974
09RH	09RHK	45	100	36	1.5	15000	16500	3700	4900	1.35	1.32
10RH	10RHK	50	110	40	2	18200	20400	3300	4500	1.81	1.77
11RH	11RHK	55	120	43	2	21800	25900	3000	4000	2.33	2.28
22312RH	22312RHK	60	130	46	2.1	25700	30400	2800	3700	2.91	2.85
13RH	13RHK	65	140	48	2.1	28100	33500	2600	3400	3.48	3.40
14RH	14RHK	70	150	51	2.1	32100	38700	2400	3200	4.20	4.11
15RH	15RHK	75	160	55	2.1	36700	44800	2200	3000	5.23	5.12
22316RH	22316RHK	80	170	58	2.1	41100	50400	2100	2800	6.15	6.01
17RH	17RHK	85	180	60	3	45300	55800	2000	2600	7.14	6.99
18RH	18RHK	90	190	64	3	50700	62900	1900	2500	8.49	8.30
19RH	19RHK	95	200	67	3	55500	70000	1800	2300	9.94	9.72
22320RH	22320RHK	100	215	73	3	64500	82200	1600	2200	12.5	12.2
22RH	22RHK	110	240	80	3	77500	99700	1400	1900	18.1	17.7
24RH	24RHK	120	260	86	3	89000	116000	1300	1800	22.9	22.4
26RH	26RHK	130	280	93	4	102000	135000	1200	1600	28.6	28.0
22328RH	22328RHK	140	300	102	4	118000	158000	1300	1700	36.2	35.5
30RH	30RHK	150	320	108	4	132000	177000	1200	1500	43.6	42.8
32RH	32RHK	160	340	114	4	145000	198000	1100	1400	51.9	51.0
34RH	34RHK	170	360	120	4	162000	224000	1000	1300	62.0	60.8
22336RH	22336RHK	180	380	126	4	178000	246000	930	1200	71.4	69.9
38RH	38RHK	190	400	132	5	198000	287000	870	1200	84.1	82.4
40RH	40RHK	200	420	138	5	210000	298000	820	1100	95.4	93.5
44RH	44RHK	220	460	145	5	242000	354000	730	970	124	122
22348RH	22348RHK	240	500	155	5	277000	406000	650	870	157	154
52RH	52RHK	260	540	165	6	318000	471000	580	780	196	192
56RH	56RHK	280	580	175	6	358000	536000	530	700	229	225