




23200RH 系統 球面滾柱軸承

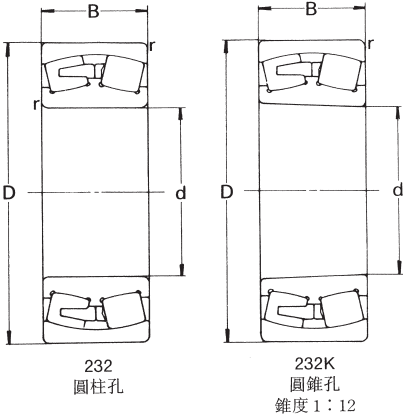

軸 承 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
圓柱孔	圓錐孔	d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	232	232K
23218RH	23218RHK	90	160	52.4	2	34300	49200	2100	2800	4.70	4.50
20RH	20RHK	100	180	60.3	2.1	43400	64100	1900	2500	6.87	6.57
22RH	22RHK	110	200	69.8	2.1	54800	80700	1700	2200	9.87	9.57
24RH	24RHK	120	215	76	2.1	62900	97500	1500	2100	12.2	11.8
23226RH	23226RHK	130	230	80	3	71600	111000	1400	1900	14.5	14.0
28RH	28RHK	140	250	88	3	82700	132000	1300	1700	19.0	18.4
30RH	30RHK	150	270	96	3	97700	157000	1200	1600	24.5	23.8
32RH	32RHK	160	290	104	3	112000	182000	1200	1600	31.0	30.1
23234RH	23234RHK	170	310	110	4	118000	191000	1100	1500	37.5	36.5
36RH	36RHK	180	320	112	4	135000	221000	1100	1400	39.8	38.6
38RH	38RHK	190	340	120	4	152000	252000	990	1300	47.4	46.0
40RH	40RHK	200	360	128	4	169000	284000	930	1200	58.1	56.4
23244RH	23244RHK	220	400	144	4	206000	341000	810	1100	81.6	79.2
48RH	48RHK	240	440	160	4	251000	422000	730	970	110	107
52RH	52RHK	260	480	174	5	293000	500000	650	860	144	140
56RH	56RHK	280	500	176	5	307000	541000	600	800	153	149
23260RH	23260RHK	300	540	192	5	360000	640000	540	720	197	192
64RH	64RHK	320	580	208	5	409000	717000	490	650	249	242