





24100R 系統

球面滾柱軸承

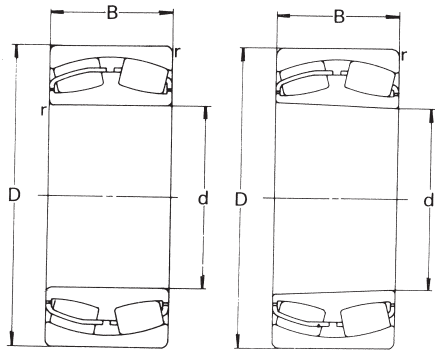

241R
圓柱孔

241RK30
圓錐孔
錐度 1 : 30



241RW33
附有一條油槽和
三個油孔

軸 承 型 號		主 要 尺 寸 (mm)				基本額定負荷 (kgf)		容許回轉數 (rpm)		重 量 (kg)	
		d	D	B	r _s 最小	動負荷 C _e	靜負荷 C _o	脂潤滑	油潤滑	241R	241RK30
24122R	24122RK30	110	180	69	2	41700	66700	1800	2400	6.85	6.76
24R	24RK30	120	200	80	2	54100	86900	1600	2200	10.1	10.0
26R	26RK30	130	210	80	2	56700	93600	1500	2000	10.8	10.6
28R	28RK30	140	225	85	2.1	62800	105000	1400	1900	12.9	12.7
24130R	24130RK30	150	250	100	2.1	81900	137000	1300	1700	19.6	19.3
32R	32RK30	160	270	109	2.1	97700	164000	1200	1600	25.2	24.9
34R	34RK30	170	280	109	2.1	99400	168000	1100	1500	26.6	26.2
36R	36RK30	180	300	118	3	118000	205000	1000	1400	33.3	32.7
24138R	24138RK30	190	320	128	3	136000	237000	950	1300	42.0	41.2
40R	40RK30	200	340	140	3	148000	254000	890	1200	51.9	51.0
44R	44RK30	220	370	150	4	172000	296000	800	1100	65.0	64.0
48R	48RK30	240	400	160	4	201000	357000	720	960	80.3	79.0
24152R	24152RK30	260	440	180	4	240000	426000	640	860	111	110
56R	56RK30	280	460	180	5	249000	453000	600	790	118	116
60R	60RK30	300	500	200	5	305000	563000	530	710	157	155
64R	64RK30	320	540	218	5	326000	611000	480	640	209	206
24168R	24168RK30	340	580	243	5	414000	777000	440	580	271	267
72R	72RK30	360	600	243	5	416000	784000	450	600	287	283
76R	76RK30	380	620	243	5	430000	838000	430	570	302	297
80R	80RK30	400	650	250	6	474000	932000	390	530	338	333
24184R	24184RK30	420	700	280	6	556000	1080000	360	480	445	440
88R	88RK30	440	720	280	6	575000	1150000	340	450	460	455
92R	92RK30	460	760	300	7.5	616000	1250000	310	410	550	544