



Pillow Block Units

UCPA type

With setscrews

Cylindrical bore

Shaft dia.: 12~50mm

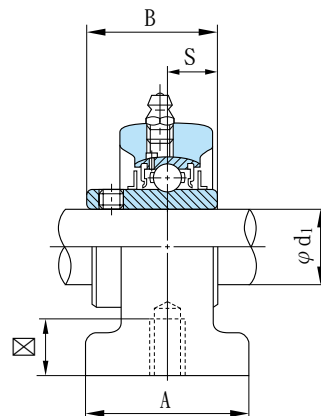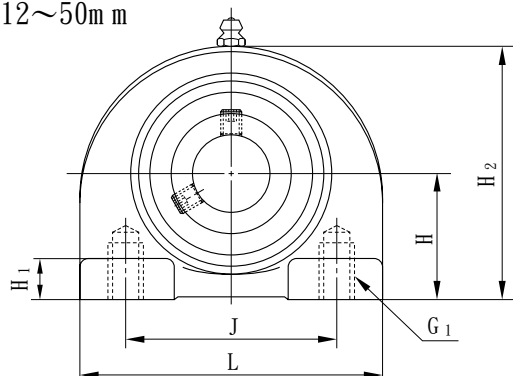

軸徑 (mm)	連座 軸承 型番	主要寸法 (mm)									
		H	L	A	J	G ₁	☒	H ₁	H ₂	B	S
12	UCPA 201	30.2	76	38	52	M 10× 1.5	12	8	62	31	12.7
15	UCPA 202	30.2	76	38	52	M 10× 1.5	12	8	62	31	12.7
17	UCPA 203	30.2	76	38	52	M 10× 1.5	12	8	62	31	12.7
20	UCPA 204	30.2	76	38	52	M 10× 1.5	12	8	62	31	12.7
25	UCPA 205	36.5	84	38	56	M 10× 1.5	15	10	72	34	14.3
30	UCPA 206	42.9	94	48	66	M 14× 2	18	10	84	38.1	15.9
35	UCPA 207	47.6	110	48	80	M 14× 2	20	12	95	42.9	17.5
40	UCPA 208	49.2	116	54	84	M 14× 2	20	12	100	49.2	19
45	UCPA 209	54.2	120	54	90	M 14× 2	25	12	108	49.2	19
50	UCPA 210	57.2	130	60	94	M 16× 2	25	14	116	51.6	19

Remark: Grease nipple: 1/4-28UNF

1N=0.102kgf

軸 承 部 份			軸承座 型番	總重量 (kg)
型 番	基本額定荷重(N)			
	Cr	Cor		
UC 201	12800	6600	PA 204	0.59
UC 202	12800	6600	PA 204	0.57
UC 203	12800	6600	PA 204	0.56
UC 204	12800	6600	PA 204	0.54
UC 205	14000	7900	PA 205	0.73
UC 206	19600	11300	PA 206	1.11
UC 207	25900	15400	PA 207	1.63
UC 208	29300	17900	PA 208	1.85
UC 209	33000	20500	PA 209	2.11
UC 210	35500	23200	PA 210	2.52