


NACHI

Silver series
Rhombic Flange Units
 UFL type
 With eccentric collar
 Cylindrical bore
 Shaft dia.: 8~30mm

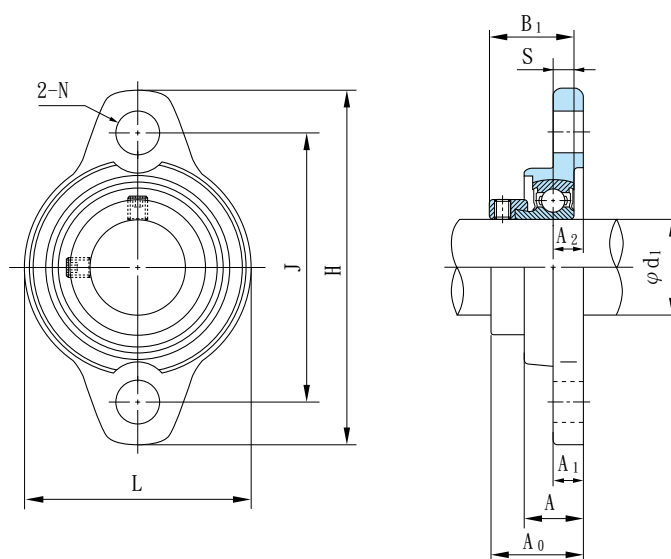

UFL type



軸徑 (mm)	連座 軸承 型番	主要寸法 (mm)												安裝 螺栓 型番	
		H	L	A	J	N	A ₁	A ₂	A ₀	B ₁	S	A ₄	A ₆		
10	UFL000	60	36	11.5	45	7	5.5	5.5	19	17.5	4	22	2	M 6	
12	UFL001	63	38	11.5	48	7	5.5	5.5	19	17.5	4	22	2	M 6	
15	UFL002	67	42	13	53	7	6.5	6.5	20.5	18.5	4.5	24	2	M 6	
17	UFL003	71	46	14	56	7	7	7	22.5	20.5	5	26	2	M 6	
20	UFL004	90	55	16	71	10	8	8	26.5	24.5	6	31	3	M 8	
25	UFL005	95	60	16	75	10	8	8	27.5	25.5	6	32	3	M 8	
30	UFL006	112	70	18	85	13	9	9	29	26.5	6.5	34	4	M 10	
8	UFL 08	48	27	8.5	37	4.8	4	4.5	16	15	3.5	—	—	M 4	

Note: (1) Setscrew type U08X is also available. Inner ring width B of U08X is 12mm. Dimension A₀ with U08X is 13mm.

M UFL type (Stainless Silver Series)

軸徑 (mm)	連座 軸承 型番	主要寸法 (mm)												安裝 螺栓 型番	
		H	L	A	J	N	A ₁	A ₂	A ₀	B ₁	S	A ₄	A ₆		
10	MUFL000	60	36	11.5	45	7	5.5	5.5	19	17.5	4	22	2	M 6	
12	MUFL001	63	38	11.5	48	7	5.5	5.5	19	17.5	4	22	2	M 6	
15	MUFL002	67	42	13	53	7	6.5	6.5	20.5	18.5	4.5	24	2	M 6	
17	MUFL003	71	46	14	56	7	7	7	22.5	20.5	5	26	2	M 6	
20	MUFL004	90	55	16	71	10	8	8	26.5	24.5	6	31	3	M 8	
25	MUFL005	95	60	16	75	10	8	8	27.5	25.5	6	32	3	M 8	
30	MUFL006	112	70	18	85	13	9	9	29	26.5	6.5	34	4	M 10	

M UFL type (Stainless Silver Series)
 With eccentric collar
 Cylindrical bore
 Shaft dia.: 10~30mm

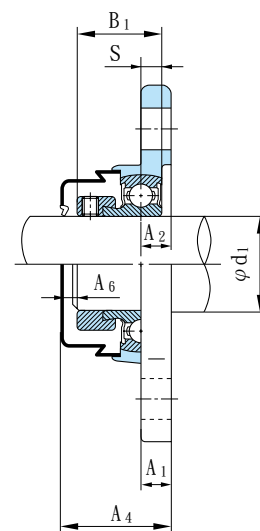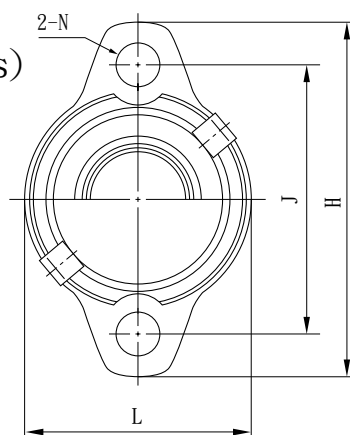

With steel covers

1N=0.102kgf

	軸 承 部 份			軸承座 型番	UnitNo. with covers		CoverNo. (Reference)		總重量(kg)	
	型 番	基本額定荷重(N)			Cover with rubber seal (End cover)	Cover with rubber seal	Side end cover	標準	附鋼製 外蓋	
		Cr	Cor							
	U 000+ER	4600	2000	FL000	UFL000C (E)	000CP10	000CPE	60	65	
	U 001+ER	5100	2400	FL001	UFL001C (E)	001CP12	001CPE	76	80	
	U 002+ER	5600	2800	FL002	UFL002C (E)	002CP15	002CPE	100	105	
	U 003+ER	6000	3300	FL003	UFL003C (E)	003CP17	003CPE	129	135	
	U 004+ER	9350	5100	FL04-5	UFL004C (E)	04-5CP20	04-5CPE	205	215	
	U 005+ER	10100	5800	FL05-6	UFL005C (E)	05-6CP25	05-6CPE	244	255	
	U 006+ER	13200	8300	FL06-7	UFL006C (E)	06-7CP30	06-7CPE	354	370	
	U 08+ER (1)	3300	1360	FL08	—	—	—	30	—	

Remark: Examples of unit numbers with cover: Both covers with rubber seal: UFL005C
 One side end cover : UFL005E

1N=0.102kgf

	軸 承 部 份			軸承座 型番	UnitNo. with covers		CoverNo. (Reference)		總重量(kg)	
	型 番	基本額定荷重(N)			Cover with rubber seal (End cover)	Cover with rubber seal	Side end cover	標準	附鋼製 外蓋	
		Cr	Cor							
	M U 000+ER	3900	1550	FL000Z3	M UFL000C (E)	000CP10	000CPE	60	65	
	M U 001+ER	4300	1900	FL001Z3	M UFL001C (E)	001CP12	001CPE	76	80	
	M U 002+ER	4750	2250	FL002Z3	M UFL002C (E)	002CP15	002CPE	100	105	
	M U 003+ER	5100	2650	FL003Z3	M UFL003C (E)	003CP17	003CPE	129	135	
	M U 004+ER	7900	4000	FL04-5Z3	M UFL004C (E)	04-5CP20	04-5CPE	205	215	
	M U 005+ER	8600	4650	FL05-6Z3	M UFL005C (E)	05-6CP25	05-6CPE	244	255	
	M U 006+ER	11300	6600	FL06-7Z3	M UFL006C (E)	06-7CP30	06-7CPE	354	370	

Remark: Examples of unit numbers with cover: Cover with rubber seal: M UFL005C
 One side end cover : M UFL005E